



TECHNICAL DATA SHEET

Passive Components


Kabelwerk | **EUPEN** AG

Rev.: 00/2005-08-18

cable

EPC-SP 70-1000 MHz 3dB Splitter

• Frequency Range	MHz	70 to 1000
• Part Number (N-Type)		EPC SP-A 005
• Power Rating (as Splitter)	W	200 (CW)
• Isolation	dB	>18
• Insertion Loss (Typical)	dB	3.5
• Return Loss (VSWR)	dB	>14
• Impedance	Ω	50
• Operating Temperature Range	$^{\circ}\text{C}$	-20 to +55
• Operating Humidity Range	%	95 % RN (Non-Condensing)
• Weight	kg	1.5
• Environmental		IP54 standard, IP65 on request
• Connectors		N-Type F standard, N-Type M and DIN 7/16 on request

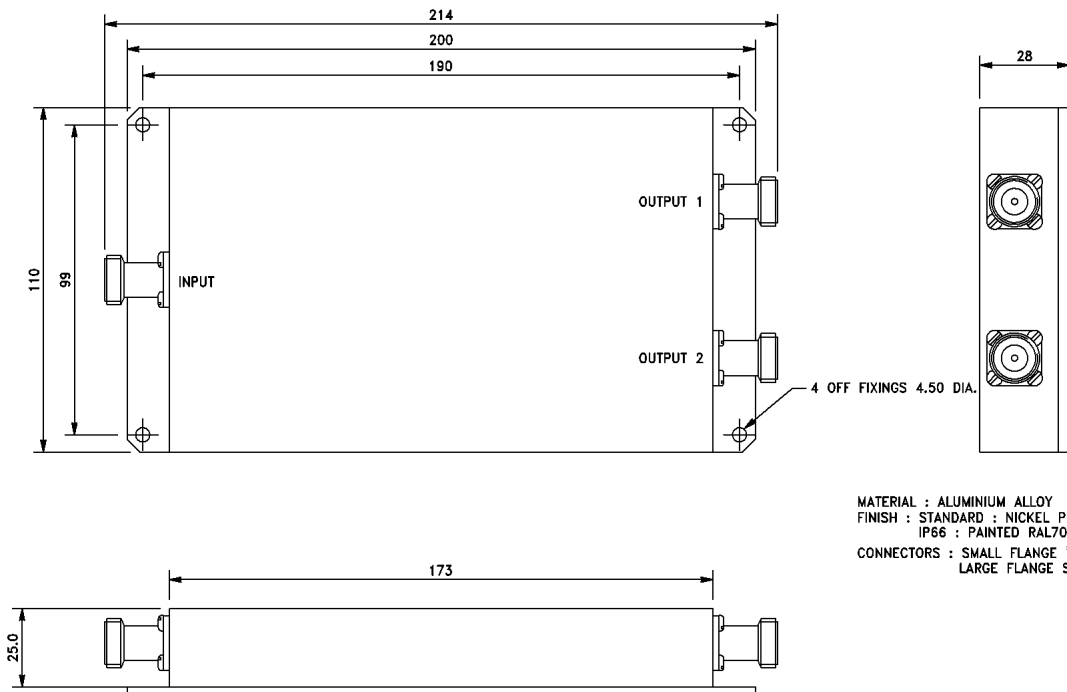

MATERIAL : ALUMINIUM ALLOY
FINISH : STANDARD : NICKEL PLATED
IP66 : PAINTED RAL7035, PALE GREY
CONNECTORS : SMALL FLANGE 'N' OR
LARGE FLANGE SMA

All measurements in mm